
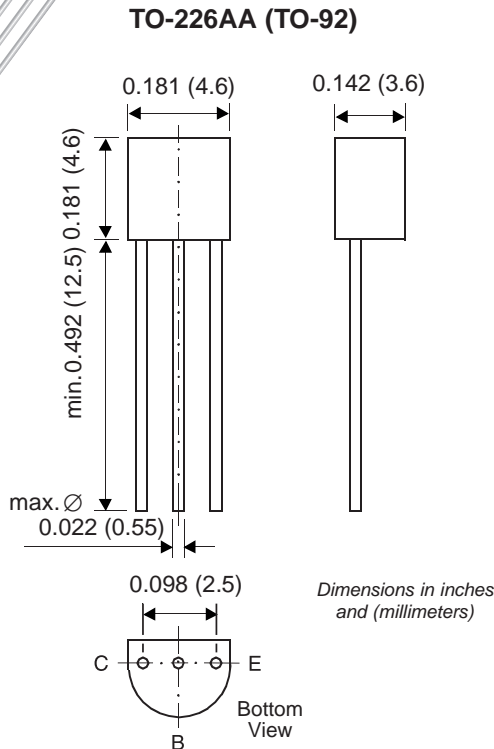


Small Signal Transistors (NPN)



Features

- NPN Silicon Epitaxial Planar Transistors
- These transistors are subdivided into three groups A, B, and C according to their current gain. The type BC546 is available in groups A and B, however, the types BC547 and BC548 can be supplied in all three groups. As complementary types the PNP transistors BC556...BC558 are recommended.
- On special request, these transistors are also manufactured in the pin configuration TO-18.

Mechanical Data

Case: TO-92 Plastic Package

Weight: approx. 0.18g

Packaging Codes/Options:

E6/Bulk – 5K per container, 20K/box

E7/4K per Ammo mag., 20K/box

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter		Symbol	Value	Unit
Collector-Base Voltage	BC546	V_{CBO}	80	V
	BC547		50	
	BC548		30	
Collector-Emitter Voltage	BC546	V_{CES}	80	V
	BC547		50	
	BC548		30	
Collector-Emitter Voltage	BC546	V_{CEO}	65	V
	BC547		45	
	BC548		30	
Emitter-Base Voltage	BC546, BC547 BC548	V_{EBO}	6 5	V
Collector Current		I_C	100	mA
Peak Collector Current		I_{CM}	200	mA
Peak Base Current		I_{BM}	200	mA
Peak Emitter Current		$-I_{EM}$	200	mA
Power Dissipation at $T_{amb} = 25^\circ\text{C}$		P_{tot}	500 ⁽¹⁾	mW
Thermal Resistance Junction to Ambient Air		$R_{\theta JA}$	250 ⁽¹⁾	$^\circ\text{C}/\text{W}$
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_s	-65 to +150	$^\circ\text{C}$

Note: (1) Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case.

BC546 thru BC548

Vishay Semiconductors
formerly General Semiconductor




Electrical Characteristics (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit	
Small Signal Current Gain	Current gain group A	V _{CE} = 5 V, I _C = 2 mA, f = 1 kHz	—	220	—	—	
	B		—	330	—		
	C		—	600	—		
Input Impedance	Current gain group A	V _{CE} = 5 V, I _C = 2 mA, f = 1 kHz	1.6	2.7	4.5	kΩ	
	B		3.2	4.5	8.5		
	C		6	8.7	15		
Output Admittance	Current gain group A	V _{CE} = 5 V, I _C = 2 mA, f = 1 kHz	—	18	30	μS	
	B		—	30	60		
	C		—	60	110		
Reverse Voltage Transfer Ratio	Current gain group A	V _{CE} = 5 V, I _C = 2 mA, f = 1 kHz	—	1.5 • 10 ⁻⁴	—	—	
	B		—	2 • 10 ⁻⁴	—		
	C		—	3 • 10 ⁻⁴	—		
DC Current Gain	Current gain group A	V _{CE} = 5 V, I _C = 10 μA	—	90	—	—	
	B		—	150	—		
	C		—	270	—		
	Current gain group A	V _{CE} = 5 V, I _C = 2 mA	110	180	220		
	B		200	290	450		
	C		420	500	800		
Current gain group A	V _{CE} = 5 V, I _C = 100 mA	—	120	—			
B		—	200	—			
C		—	400	—			
Collector Saturation Voltage	V _{CEsat}	I _C = 10 mA, I _B = 0.5 mA I _C = 100 mA, I _B = 5 mA	— —	80 200	200 600	mV	
Base Saturation Voltage	V _{BEsat}	I _C = 10 mA, I _B = 0.5 mA I _C = 100 mA, I _B = 5 mA	— —	700 900	— —	mV	
Base-Emitter Voltage	V _{BE}	V _{CE} = 5 V, I _C = 2 mA V _{CE} = 5 V, I _C = 10 mA	580 —	660 —	700 720	mV	
Collector-Emitter Cutoff Current	BC546 BC547 BC548 BC546 BC547 BC548	I _{CES}	V _{CE} = 80 V	—	0.2	15	nA
			V _{CE} = 50 V	—	0.2	15	nA
			V _{CE} = 30 V	—	0.2	15	nA
			V _{CE} = 80 V, T _J = 125°C	—	—	4	μA
			V _{CE} = 50 V, T _J = 125°C	—	—	4	μA
			V _{CE} = 30 V, T _J = 125°C	—	—	4	μA
Gain-Bandwidth Product	f _T	V _{CE} = 5 V, I _C = 10 mA, f = 100 MHz	—	300	—	MHz	
Collector-Base Capacitance	C _{CB0}	V _{CB} = 10 V, f = 1 MHz	—	3.5	6	pF	
Emitter-Base Capacitance	C _{EB0}	V _{EB} = 0.5 V, f = 1 MHz	—	9	—	pF	
Noise Figure	BC546, BC547 BC548	F	—	2	10	dB	
			V _{CE} = 5 V, I _C = 200 μA, R _G = 2 kΩ, f = 1 kHz, Δf = 200 Hz				

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Admissible power dissipation versus temperature

Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

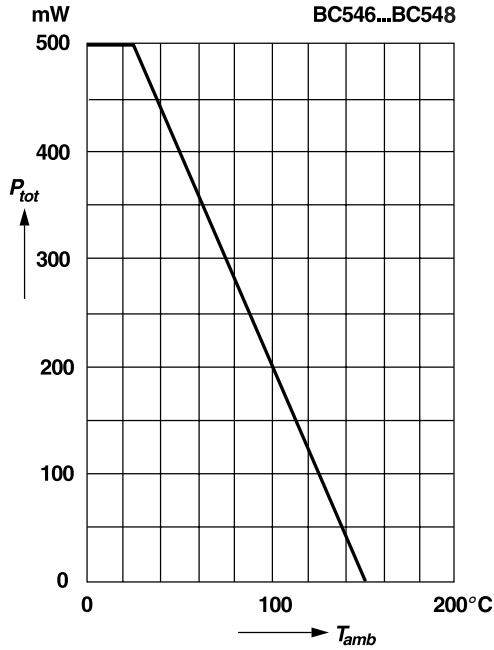


Pulse thermal resistance versus pulse duration


Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

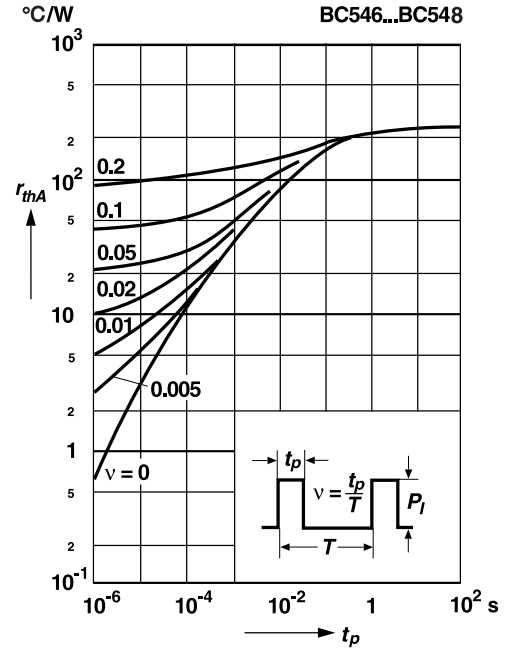

DC current gain versus collector current

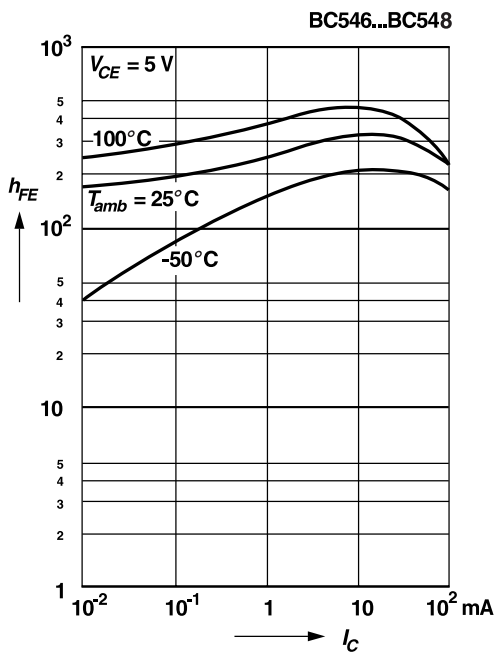

Collector-base cutoff current versus ambient temperature

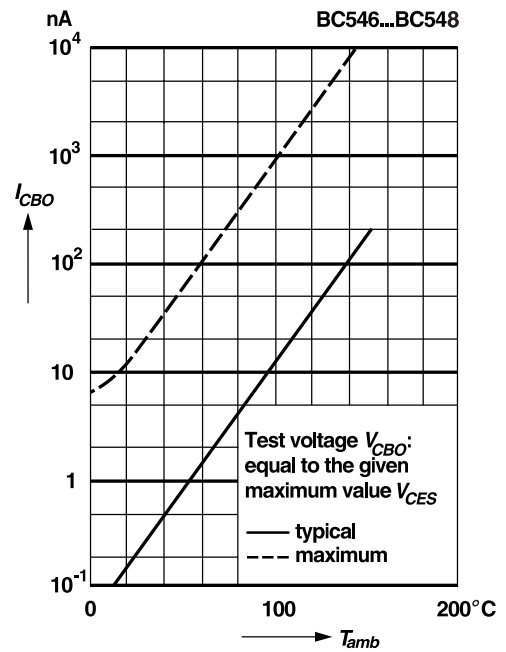


BC546 thru BC548

Vishay Semiconductors
formerly General Semiconductor




Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Collector current versus base-emitter voltage

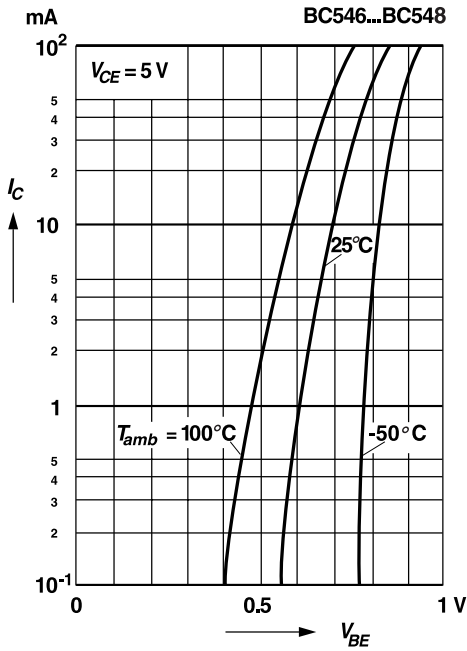


Collector saturation voltage versus collector current

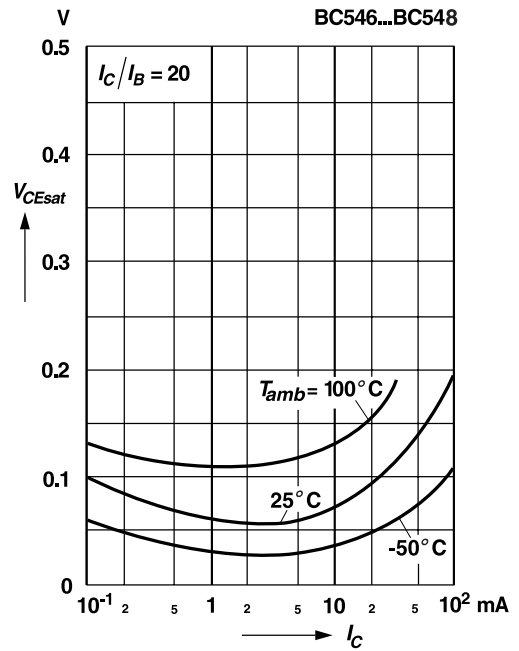

Collector-base capacitance, Emitter-base capacitance versus reverse bias voltage

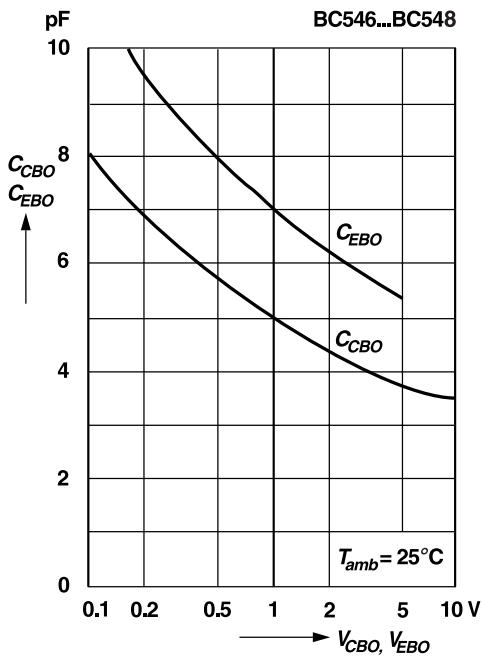

Relative h-parameters versus collector current

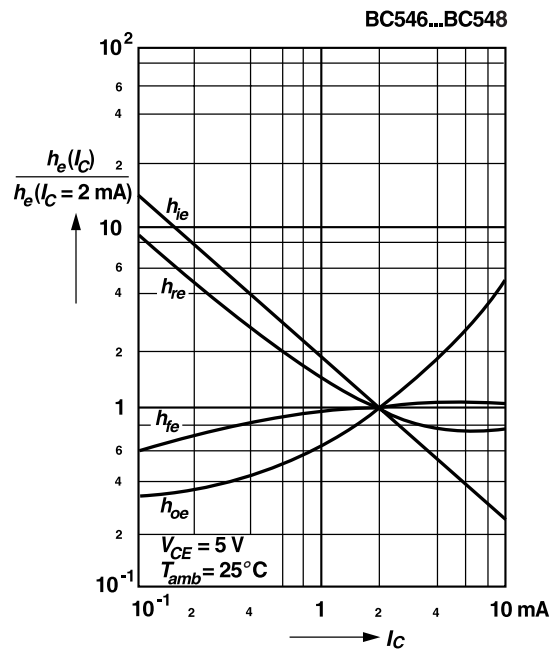



Ratings and
Characteristic Curves (T_A = 25°C unless otherwise noted)

Gain-bandwidth product
versus collector current

